


Paragon Chevron Installation Guide



PARAGON CHEVRON
(100 X 293mm)

Inspection:

All tiles must be examined and approved prior to installation. Use of product implies acceptance.

Substrate:

The substrate must comply with drying times, as recommended in BS 8204-1: 2003 + Amendment 1: 2009. The tiles with adhesive weigh approximately 41kg p/m².

Tiling Standards: As per BS 5385 Part 1: 2018

Wall installation, INTERNAL below 3m: *General* - Gypsum fibre board, tile backing boards, block and/or brick walls may be suitable if their published weight ratings comply. *General with recommendations* - 20mm Wedi Tile-backer board as accredited under BBA certificate 00/3675. For shower enclosures refer to Wedi installation guides as accredited under BBA Certificate 00/3675. See www.wedi.co.uk or for technical advice call 0161 864 2336.

Wall installation, INTERNAL above 3m: 12 Wedi approved PW60 washers and Wedi approved fasteners p/m² in accordance with their specifications. *Note: 12 fixings p/m² is a Wedi specification especially for Island Stone products therefore this number of fixings supersedes Wedi's generic general instructions.* Where Wedi sheets join/butt these are to be taped with Wedi tape. *Consultation with Island Stone's technical department to determine methodology and for fit for purpose status. Approval is subject to sighting of drawings. Engineering may be required.* See www.wedi.co.uk or for technical advice call 0161 864 2336.

Wall installation, EXTERNAL below 3m or first floor height): Suitable backing structures such as block work or external rated tile backing boards with the appropriate weight rating for the chosen tile. Ensure sufficient fixings for anticipated weights are in accordance with the respective manufacturers guidance.

Wall installation, EXTERNAL above 3m: Back structure specification can be obtained specific to your project from Knauf (aqua-panel). See www.knauf.co.uk or 0800 030 4135. *Consultation with Island Stone's technical department to determine methodology and fit for purpose status. Approval is subject to sighting of drawings. Engineering may be required.*


Fixing - wall only:

Adhesive: ARDEX recommend ARDEX MICROTEC X77 (flexible floor and wall adhesive in white or grey - choose to compliment stone colour), suitable for indoor-outdoor and swimming pool applications. ARDEX MICROTEC X77 S is recommended if a rapid set adhesive is required. It should be noted that when fixing tiles to walls, guidance is given in BS 5385 Part 1: 2018 regarding the maximum weight of the tile that can be fixed on various backgrounds. For ARDEX technical advice call 0144 071 4939.

The tile must be back-buttered with 100% coverage, the substrate also requires 100% notched trowel coverage in straight lines (not arc's). When placing the tile onto the substrate tilt towards you slightly in such a way as to allow air to escape through the adhesive notches before firming positioning the tile. This or other methodologies is to ensure there are no voids behind the tile.

Movement:

As every installation/building is unique, installers need to be familiar with the latest movement building standards and factor these into their installation where applicable. Advice is given in the relevant part of BS 5385 Part 1: 2018

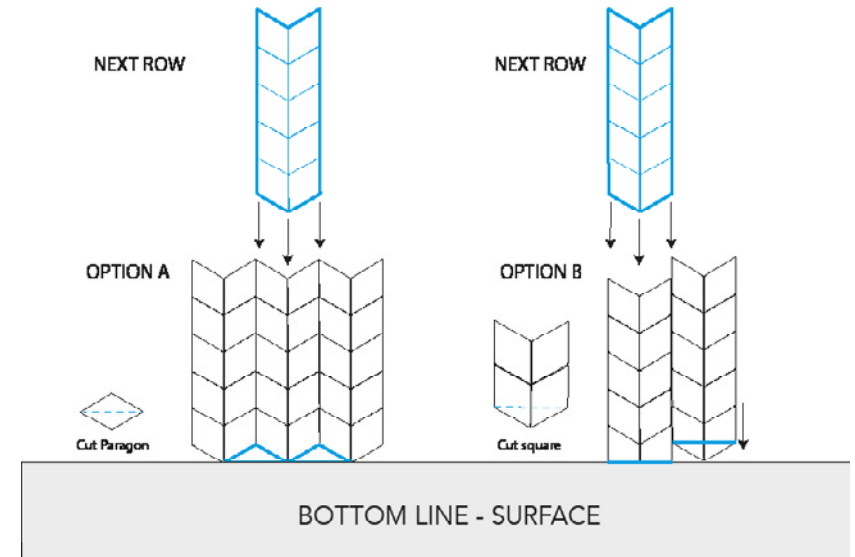

Installation:

A typical installation of Paragon Chevron employs the following methods.

Option A: The first row of tiling needs to be laid full tile vertically. A triangle portion needs to be cut from the paragon shape and inserted to complete bottom row. (See diagram)

Care should be taken to ensure that the vertical lines stay straight and do not wave. A datum/laser line must be established every two or three rows to ensure a quality finish. Tiles may need fractional/minor adjustment to be evenly spaced up to the datum/laser line.

Option B: The first row of tiles are laid vertically with bottom of tile cut square. This will ensure a straight edge on bottom line / surface. Care should still be taken to ensure that the vertical lines as per above. Full tiles are then laid to desired height. Top line can be completed by the same method, cutting tiles as required.

External Corners: Normally an aluminium or S/S box section can be used.


Grout Spacing: Not required, tiles are to be installed butt joining method.

Sealers:

It is recommended that the tiles are sealed with your choice of natural stone sealers. For example Lithofin MN Stain-Stop seals and keeps the stone relatively unchanged in appearance. Alternatively MN Stain-Stop PLUS (the PLUS refers to an added colour enhancer) which intensifies the colour of the stone. However there is a school of thought that walls (not subject to high public traffic/exposure) may avoid the sealing process, this is a personal choice.

It is advised to test your choice of sealer first in an area to ensure the chosen sealer is providing the desired finish. For your local stockist and further technical advice on Lithofin products call 01962 732 126 or visit www.lithofin.com

Paragon Chevron Installation Guide



PARAGON CHEVRON
(100 X 293mm)

Cleaning:

It is recommended that PH neutral cleaners are used. Be wary of acid based cleaners they will break down the sealer over time. PH Neutral cleaners available from Lithofin are Easy-Care (for general purpose maintenance) or Lithofin Wexa for a commercial clean, this probably is only needed on floors periodically or walls at floor level where enthusiastic mopping may have tarnished the visual appearance of the bottom layer of wall tiles.

Disclaimer:

The guidelines provided by Island Stone are limited to the tile itself. Island Stone is not an authoritative source on other manufacturer technical specifications. The information provided above has been gathered in consultation with Ardex, Wedi systems and Lithofin and issued in good faith. Specific Information with regards to fixing, adhesives, build standards or methods, substrate loadings, tolerances and engineering issues for individual projects are outside our scope of expertise. Contractors need to ensure by their own independent enquiries that all aspects of installation abide by the latest building standards/interpretations and comply with the all other suppliers recommendations.

